


REV	DATE	REV. DIMENSION	DRAW	CHECK	APPROVE
△1	2016.09.08	NEW DRAWING	Wendy	Dvaid	Leo

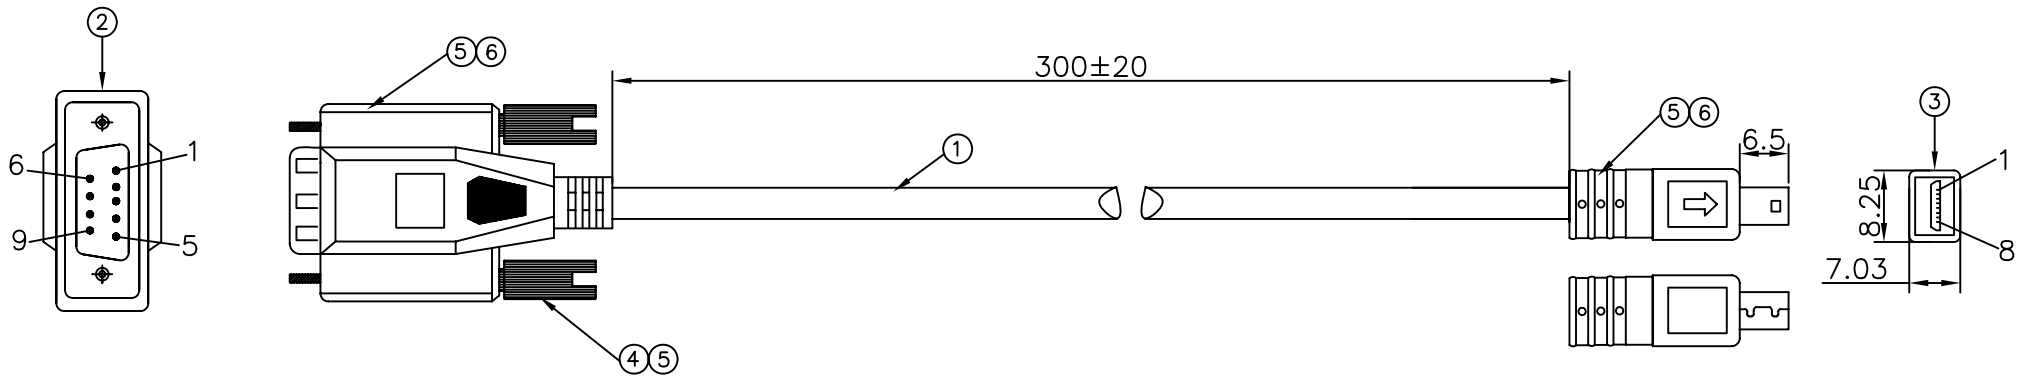

CONN.1: DB9 Male Molding

CONN.2: MINI-8PIN Male Molding

PIN Assignment		
Conn.1		Conn.2
3	_____	1
7	_____	2
2	_____	3
8	_____	4
4	_____	5
6	_____	6
		NC 7
5	_____	8
Shell	_____ Drain Wire _____	Shell

Electronic Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance : 2 ohm max
3. Insulation Resistance : 10M ohm Min
4. Hi-Pot : 300V DC/10ms

NO.	NAME	DESCRIPTION	Q'TY	UNIT
⑥	Plastic	Inner Moulding: LD-PE, Transparent	4	G
⑤	Plastic	Ouster Moluding: PVC 45P, 3U2X(BLACK)	10	G
④	Screw	Screw: 2.3*47, Nickel Plated, Insulation:3U2X(Black)	2	PCS
③	Connector	MINI-8PIN Male Solder Type, Contact:Gold Plated, Shell:Nickel Plated Insulation: Black	1	PCS
②	Connector	DB9 Male Solder Type, Contact:Gold Plated, Shell:Nickel Plated, Insulation: Black	1	PCS
①	Cable	UL2464 28AWG*7C+D+AL OD:4.6MM PVC Jacket:Black	385	MM

	RoHS Compliant			
	DESCRIPTION	DB9 Male To MINI-8PIN Male Cable, Black, 300MM		
	CUSTOMER			
HS CODE	8544.414.000	PRODUCT NO.		
BARCODE		BAFO NO.		
DRAW.	Wendy	DWG NO.	BA-165035	REV. 1
CHECK.	Dvaid	DATE.	2016.09.08	SCALE. NONE
APP.	Leo	SIZE.	A4	UNIT. mm SHEET 1/1